

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

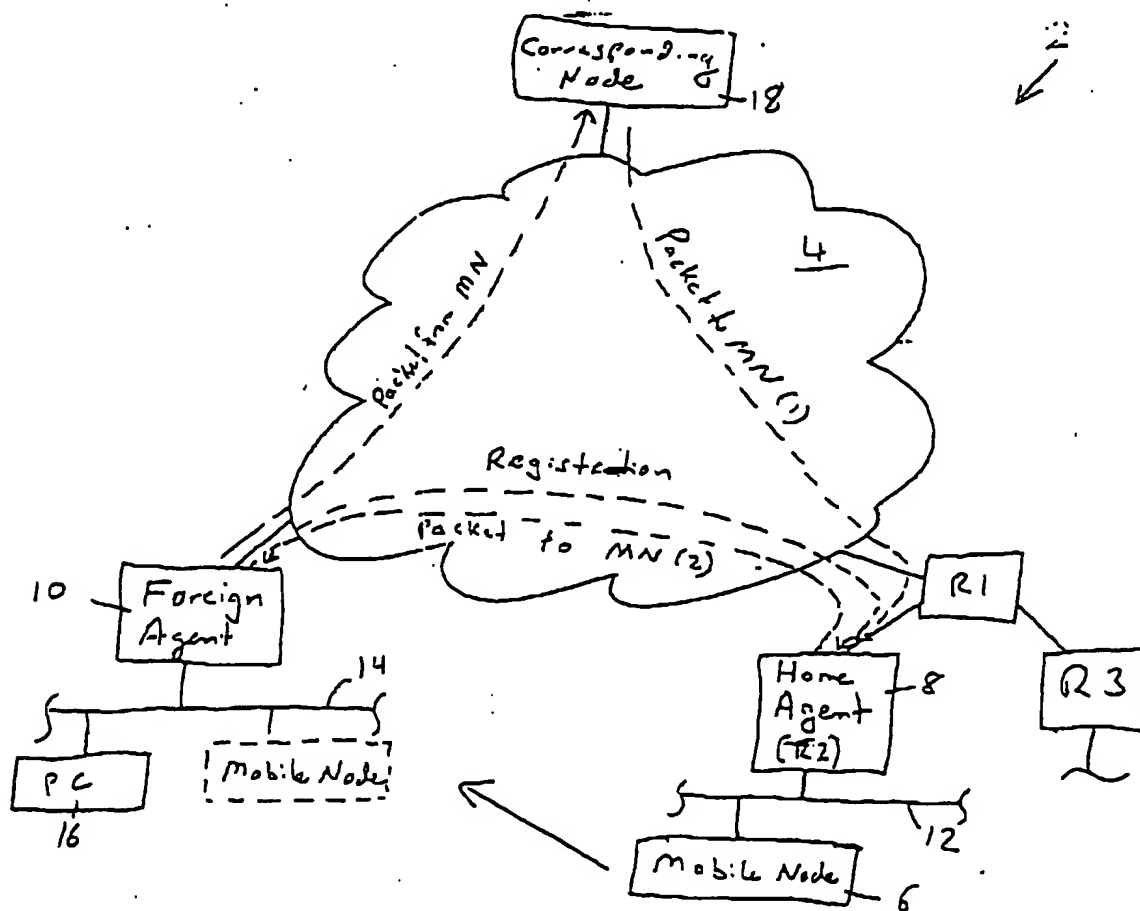


FIG. 1

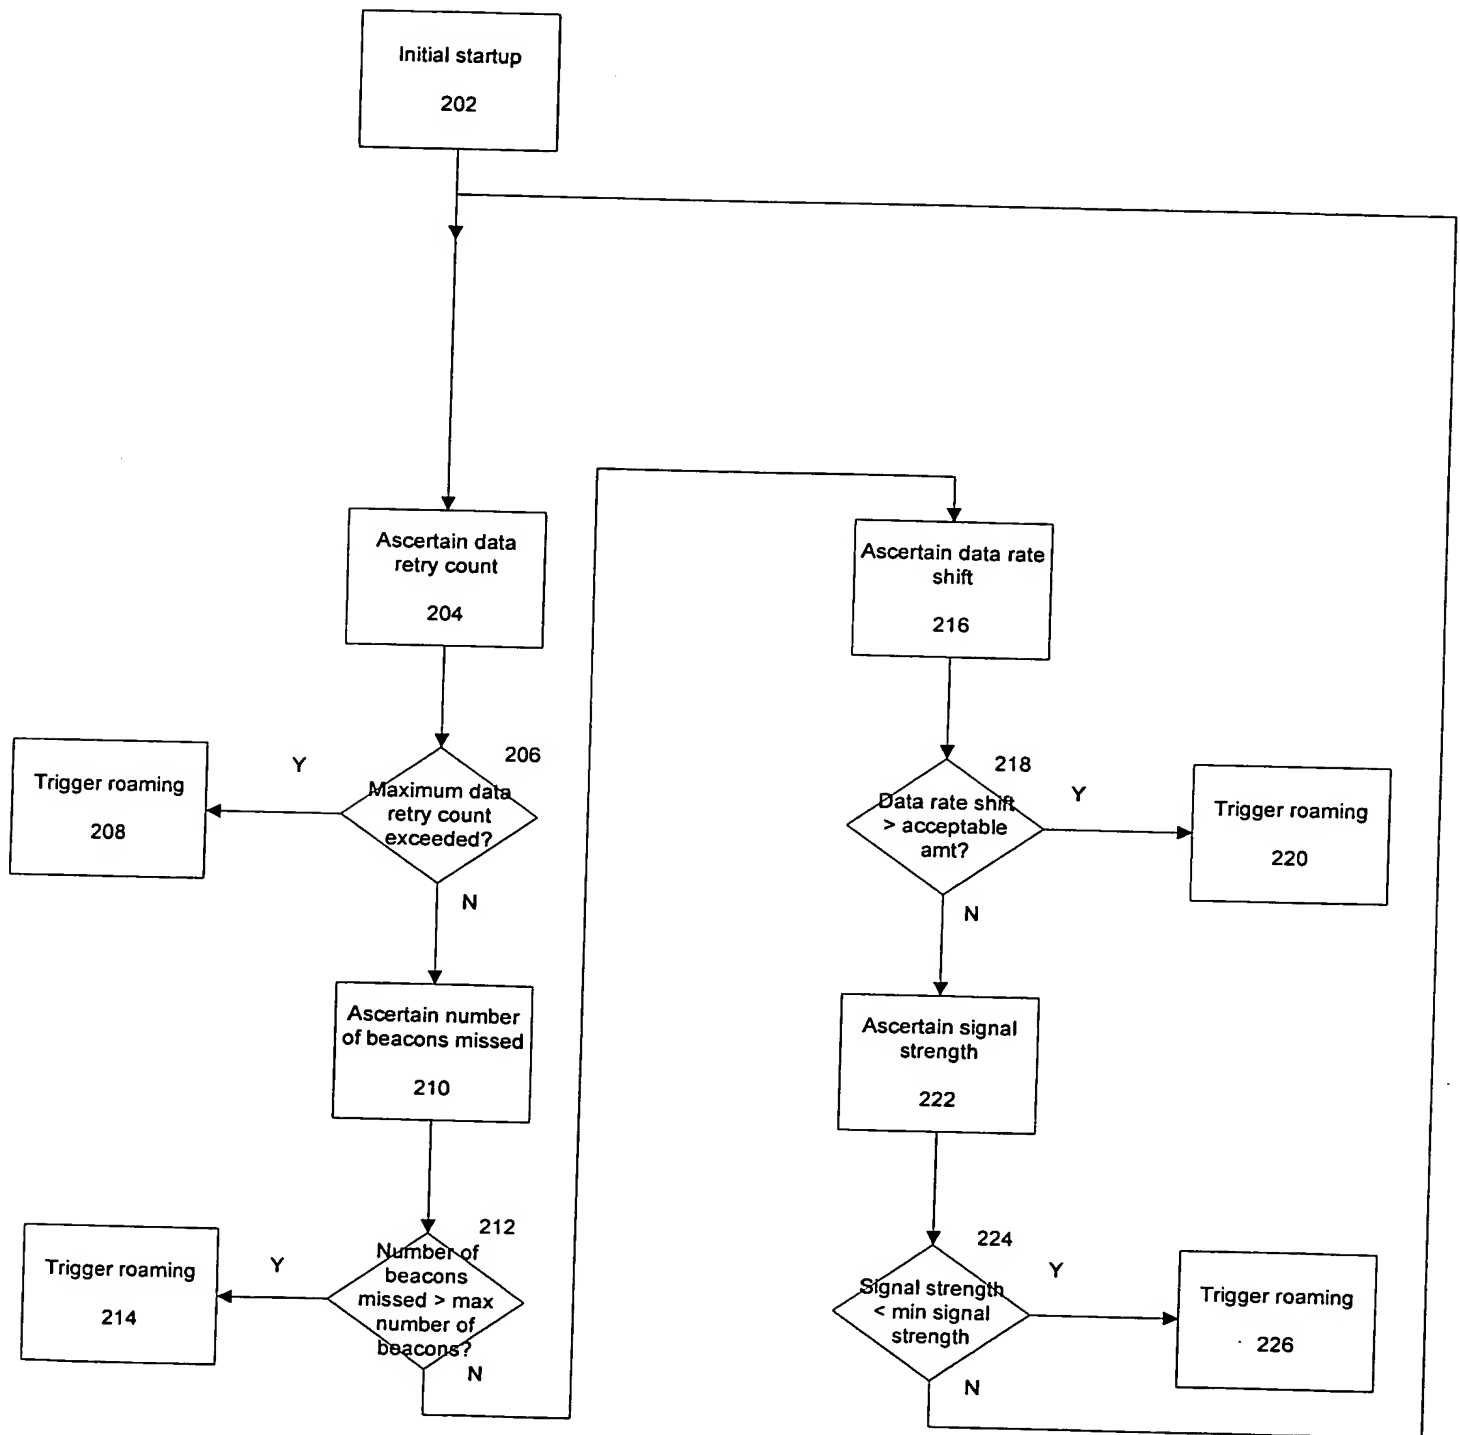


FIG. 2

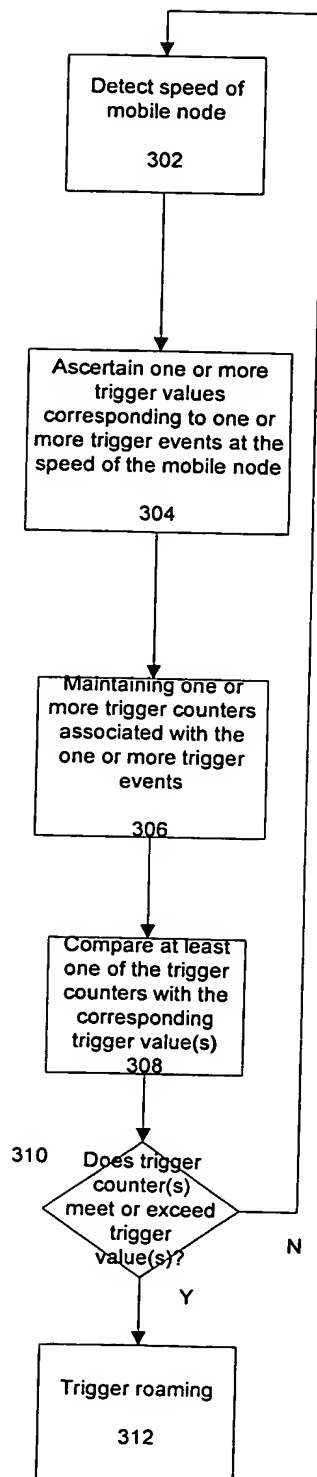


FIG. 3

Speed range	0-1 mph	1-3 mph	3-10 mph	10-30 mph
Max data retry count trigger value	12	8	4	1
Max missed beacons trigger value	4	3	2	1
Max data rate shift trigger value	30	15	7.5	3
Min signal strength trigger value	25	12.5	6.25	3.125

FIG. 4

Speed range	0-1 mph	1-3 mph	3-10 mph	10-30 mph
Max data retry count multiplication factor	1	2/3	1/3	1/12
Max missed beacons multiplication factor	1	3/4	2/4	1/4
Max data rate shift multiplication factor	1	1/2	1/4	1/10
Min signal strength multiplication factor	1	1/2	1/4	1/8

FIG. 5

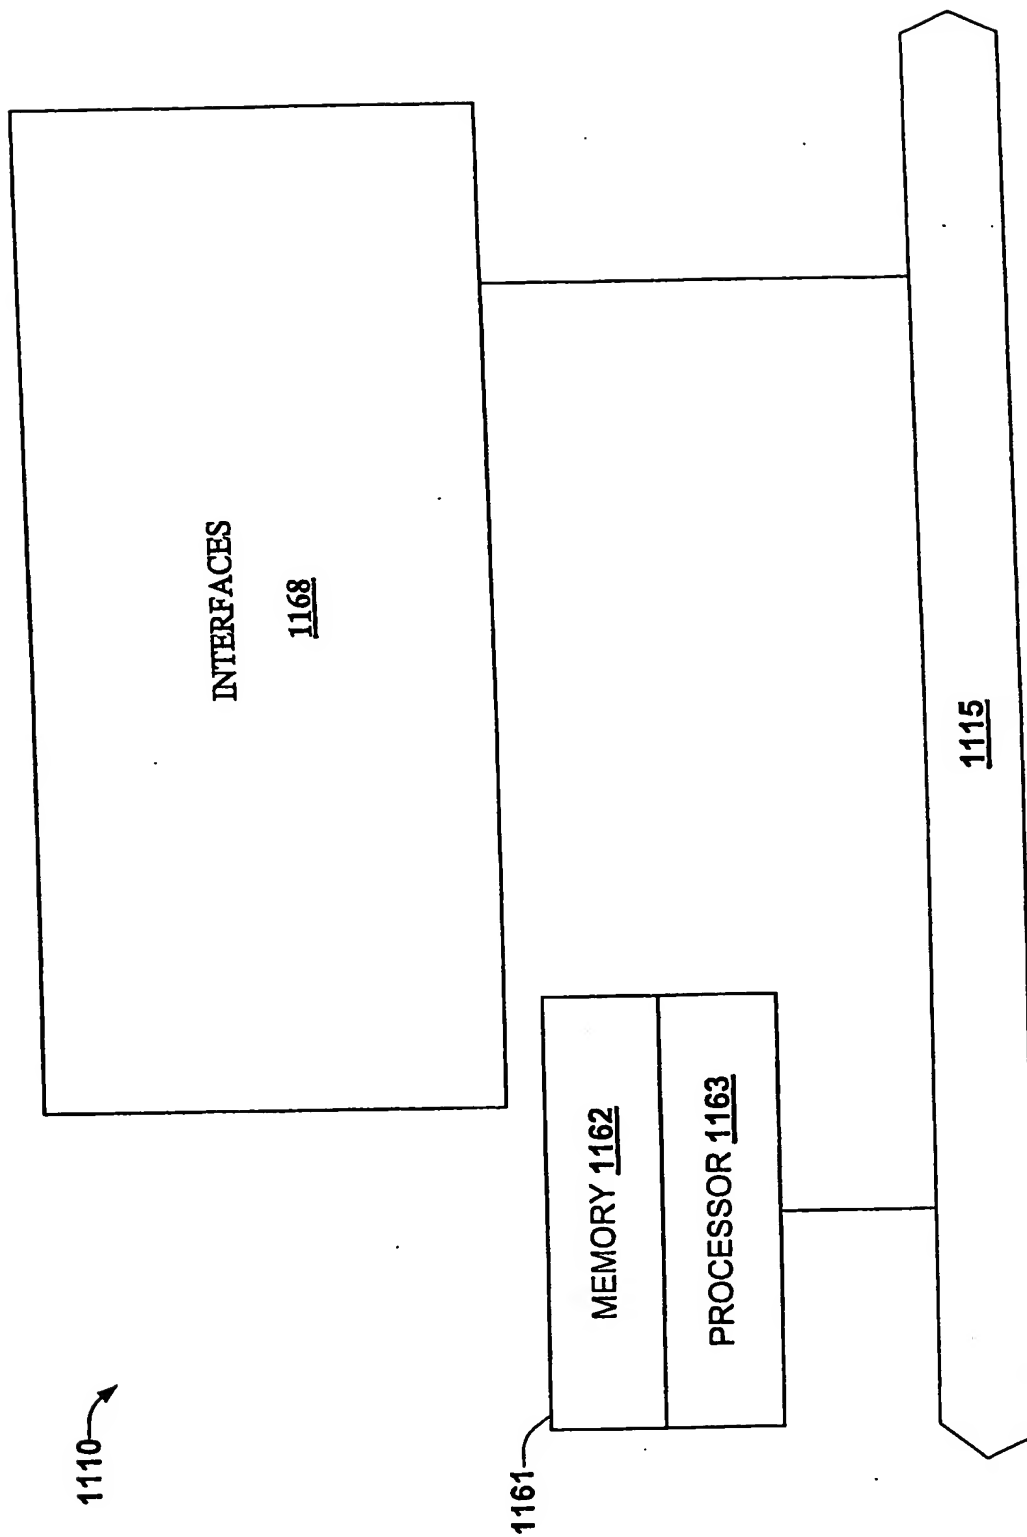


Figure 11